


# Act on time!



Anticipate the failure of your PD Blowers by  
**PREVENTIVE MAINTENANCE**  
advised by HIBON

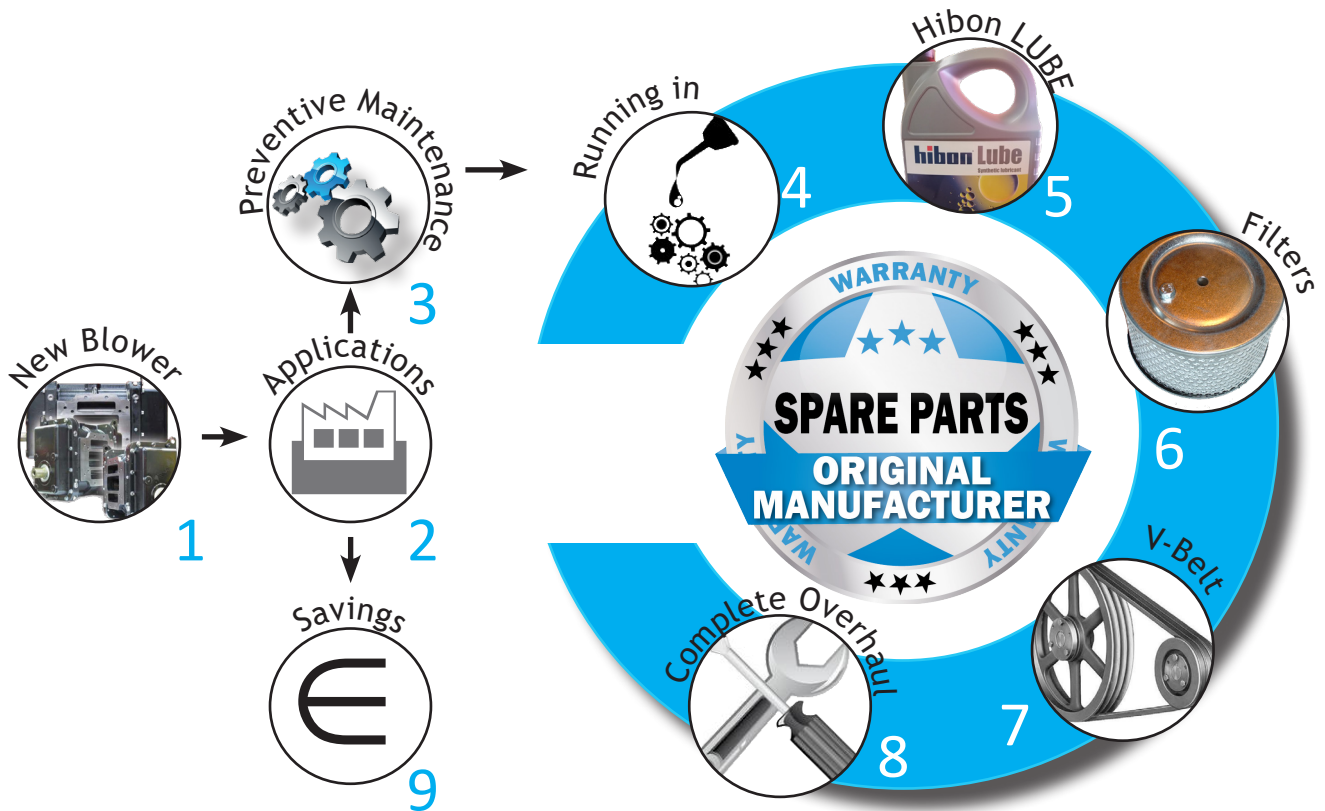

## YOUR BLOWER'S MAINTENANCE PLAN\* ADVISED BY HIBON

1. New Blower
2. Application
3. Preventive Maintenance
4. 1st oil change (running in) after 200 hours
5. Oil change: 8 000 hours
6. Inlet Filter cartridge change: 8 000 hours
7. Vbelt replacement: 8 000 hours
8. Complete overhaul: between 15 000 & 17 000 hours.
9. Savings\*\*

\* Based on the conditions of use (temperature, pressure...) with exclusive use of HIBON LUBE.

\*\* According to EPRI (Electric Power research Institute), the cost of Preventive Maintenance is 13.6 ¢/kW/year against 17.7 ¢/kW/year for corrective maintenance.

**hibon**<sup>®</sup>

judith\_lutaster@irco.com -  
stephanie.kawohl@irco.com -  
cgueguen@irco.com -  
2 avenue Jean-Paul Sartre - 59290 Wasquehal FRANCE  
Tel: +33 (0) 3 20 45 39 45  
www.hibon.com

Tel : +33 (0)3 20 45 39 54  
Tel : +33 (0)3 20 45 39 61  
Tel : +33 (0)3 20 45 39 84

**IR** Ingersoll Rand<sup>®</sup>



# Think about Maintenance Spare parts

PIÈCES DE RECHANGE - ERSATZTEIL - REPUESTOS - RICAMBI



## Maintenance Frequency of your Blowers

- ✓ 1<sup>st</sup> oil change (running in) :  
after 200 hours,
- ✓ Oil and Vbelt change :  
every 12 months,
- ✓ Change of filters :  
at least once a year,
- ✓ Blower check up :  
recommended every 3 years or  
between 15 000 & 17 000 hours.




FILTERS		
Package**	Blower	CCN
SF0_2 (P - PC)	NX2	A051010080
SF0_2 (C - CC - V - VC)	NX2	A062509000
SF0_3 (P - PC)	NX3	A051010080
SF0_3 (C - CC - V - VC)	NX3	A062509000
SF1_5	NX5	A051010080
SF1_8	NX8	A051010125
SF2_12	NX12	A050910150
SF2_18 (P - PC - C - CC)	NX18	A050910175
SF2_18 (V - VC)	NX18	A051010150
SF3_26	NX26	A050910200
SF3_43	NX43	A051010175

Package Configuration**	
P = Pressure	CC = Canalised with enclosure
PC = Pressure with enclosure	V = Vacuum
C = Canalised	VC = Vacuum with enclosure

OIL HIBON LUBE	
NX2 to NX5	LUB1000002-5
NX8 to NX 26	LUB1000005
NX 43	LUB1000005

BELTS
Set of belts

CCN available on order and if not synchronized





# Think about Maintenance Spare parts

PIÈCES DE RECHANGE - ERSATZTEIL - REPUESTOS - RICAMBI

## S2H

### Maintenance Frequency of your Blowers

- ✓ 1<sup>st</sup> oil change (running in) :  
after 200 hours,
- ✓ Oil and Vbelt change :  
every 12 months,
- ✓ Change of filters :  
at least once a year,
- ✓ Blower check up :  
recommended every 3 years or  
between 15 000 & 17 000 hours.

### FILTERS

Package**	Blower	CCN
SF00_0.5 (P)	S2H22	A062503000
SF00_0.5 (PC)	S2H22	A050230080
SF00_0.5 (C - CC- V - VC)	S2H22	A062505000
SF00_1.3 (P)	S2H31	A062509000
SF00_1.3 (PC)	S2H31	A050230080
SF00_1.3 (C - CC- V - VC)	S2H31	A062505000
SF00_1.5 (P)	S2H32	A062509000
SF00_1.5 (PC)	S2H32	A050230080
SF00_1.5 (C - CC- V - VC)	S2H32	A062505000
SFO_1.5 (P)	S2H32	A062505000
SFO_1.5 (PC)	S2H32	A051010050
SFO_1.5 (C - CC - V - VC)	S2H32	A062509000
SFO_3.5 (P)	S2H42	A062507000
SFO_3.5 (PC)	S2H42	A051010050
SFO_3.5 (C - CC - V - VC)	S2H42	A062509000
SFO_5.5 (P - V - VC - C - CC)	S2H52	A062509000
SFO_5.5 (PC)	S2H52	A051010080

### Package Configuration\*\*

P = Pressure	CC = Canalised with enclosure
PC = Pressure with enclosure	V = Vacuum
C = Canalised	VC = Vacuum with enclosure

### OIL HIBON LUBE

S2H	LUB1000002-5
-----	--------------

### BELTS

Set of belts

CCN available on order and if not synchronized

